

One-Stop Intelligent Charging Network

MaxiCharger DC Series

Ultimate Experience


Fast, smooth, and user-friendly, with the one-stop intelligent charging network

Superior Performance

Reliable, durable, and always online, with the remote O&M platform

Maximum Yield

Efficient, scalable, and highly utilized, with the AI charging technology

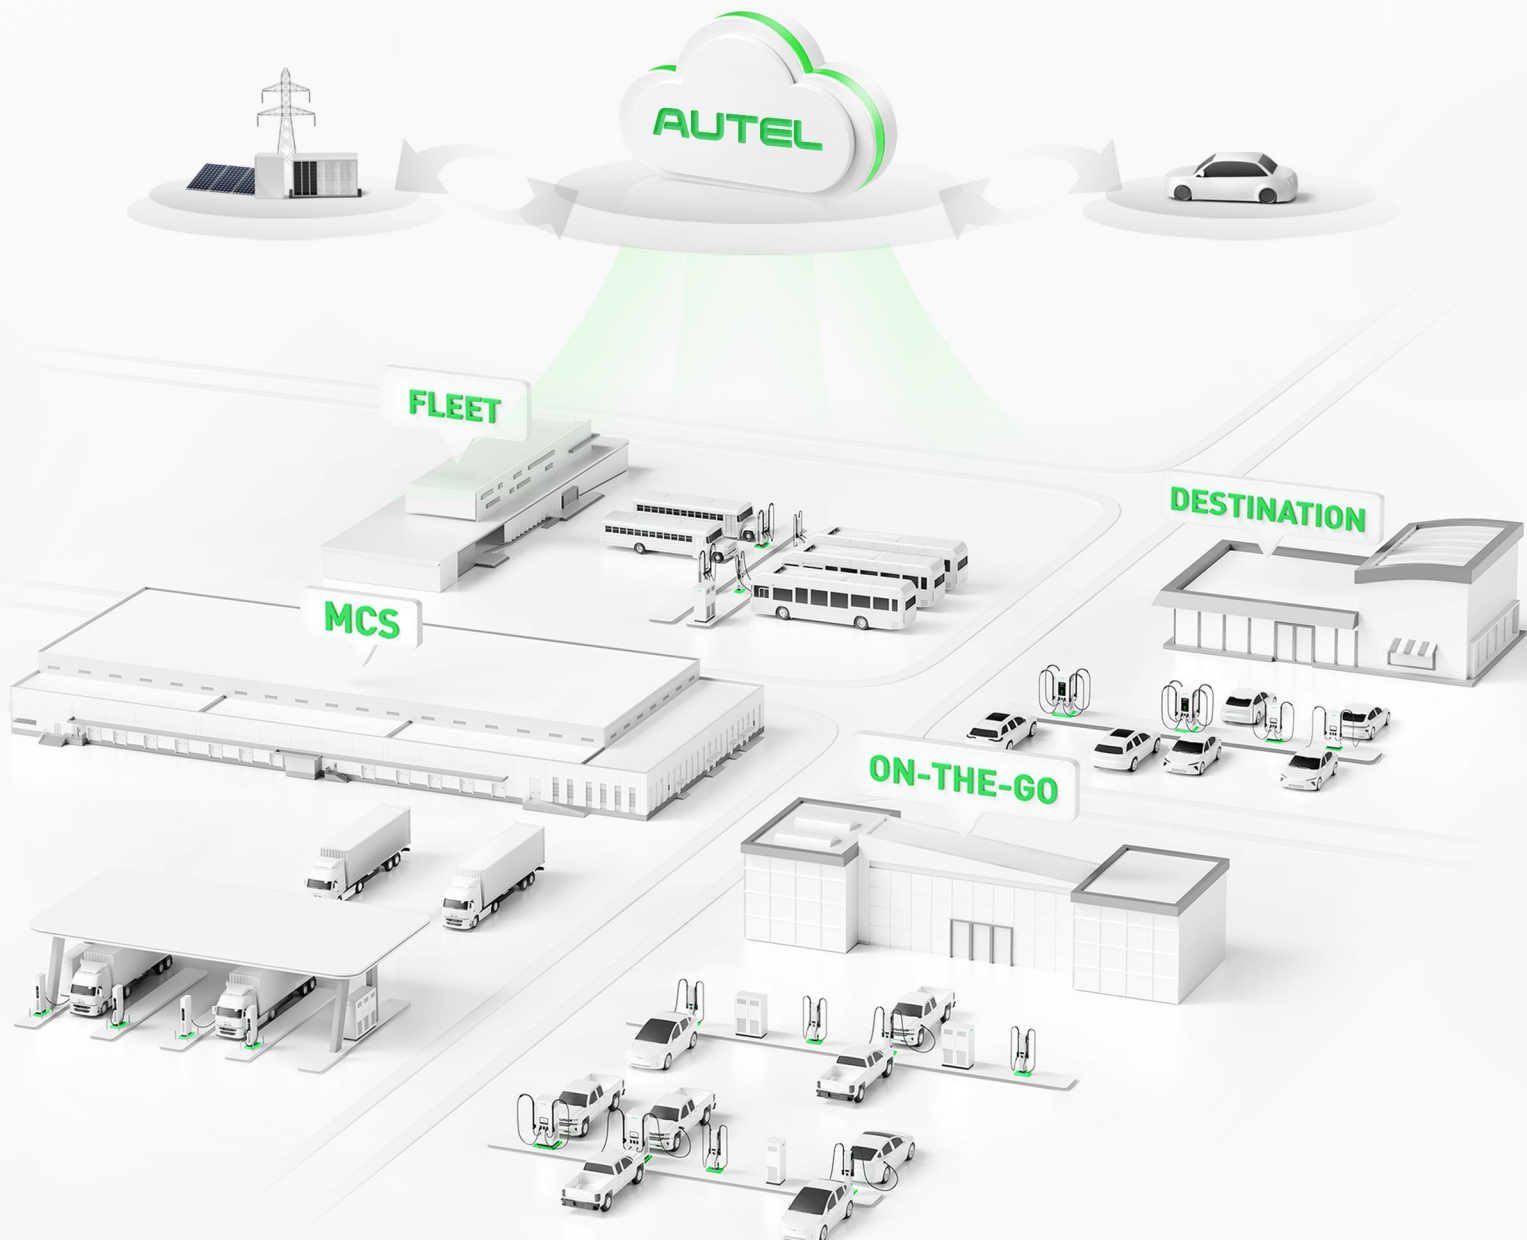



All-in-one Charging Unit
80kW-480kW

Distribution Charging Unit
160kW-1440kW

The new-generation MaxiCharger DC series offers the one-stop intelligent charging network with cutting-edge innovations powered by AI. It provides a reliable performance with full-modular design, Eco-Cooling technology and site-level network hot backup. Intelligent vehicle-charger-cloud compatibility and charging curve prediction technology empower customers to maximize yield. Paired with PV+ESS integration and real-time energy dispatch algorithms, it optimizes total cost of ownership (TCO) while increasing revenue.

Ultimate Experience



Fastest Charging
Up to 1 km of range per second



Full Vehicle Coverage
Charging success rate exceeds 95%



Seamless Payment
Convenient payment without any downloads or registration

Superior Performance



Reliable Charging
Supports uptime 98%+



High Online Rate
Ensures over 99.9% online rate



Intelligent O&M
Enables remote maintenance with all-online O&M

Maximum Yield



Intensive Utilization
Improves charging efficiency by 10%



Optimal Power Usage
E2E efficiency up to 96%



Easy PV & BESS Integration
Supports future expansions, integrating with PV & BESS

All-in-one Charging Unit



DH240

DC Output

Output Power	80kW - 240kW
Minimum Adjustable Power	40kW granularity
Output Voltage	150 - 1000V
Output Current	Uncooled Cable: 380A (Max. 500A);
Peak Efficiency	96%
Number of Outputs	2 or 1
Charging Mode	2*CCS2; 1*CCS2

AC Input

Input Voltage	3-phase 400V AC $\pm 10\%$
Input Frequency	50Hz/60Hz
Earthing System	TN-S, TN-C, TN-C-S, TT
Input Connection	3 Phases+PE
Power Factor	≥ 0.99
Harmonic Distortion (THDi)	$< 5\%$
Overvoltage Category	AC side (Input) OVC: III

General Specifications

Dimensions (WxDxH)	782mm x 478mm x 2287mm
Connectivity	Double SIM 4G, 5G, Wi-Fi, Ethernet
Screen Type	27 inch LCD Touch Screen
Cable Length	5m; 7.2m(Optional)
Standby Power	$< 85W$ (Depending on configuration)
Enclosure Rating	IP54/IK10
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS
Accessibility	Meets ADA requirements for height, reach, and user interface
Emergency Button	Yes
Warranty	24 months, warranty extension possible

User Interface

Status Indication	Standard
Languages	English, French, Spanish, German, Italian (others available via software upgrade)
Credit Card Readers	Nayax Onyx; Payter P66/Apollo; PAX IM30; Worldline Valina; Castles S1U2
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE
Payment Terminal	AutoCharge, Plug & Charge, APP, RFID card, QR code, Credit Card (Optional)
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)
Cable Management System	Standard

Environmental Specifications

Humidity	$< 95\%$ RH, non-condensing
Operating Altitude	2000m
Operating Temperature Range	-35°C to 55°C
Storage Temperature Range	-40°C to 70°C
Noise	$\leq 55\text{dBA}^*$ (Silent Mode)
EMC Compliance	EMC Class A
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV

(1) Standard environmental conditions 25°C , 1 m distance



Phone: +49(0)89 540299608
E-mail: evinfo.eu@autel.com
Website: autelenergy.com

All-in-one Charging Unit



DH480	
DC Output	
Output Power	120kW - 480kW
Minimum Adjustable Power	40kW granularity
Output Voltage	150 - 1000V
Output Current	Liquid-cooled Cable: : 500A (Max. 650A) Uncooled Cable: 380A (Max. 500A)
Peak Efficiency	96%
Number of Outputs	2
Charging Mode	2*CCS2
AC Input	
Input Voltage	3-phase 400V AC $\pm 10\%$ (2 Routes)
Input Frequency	50Hz/60Hz
Earthing System	TN-S, TN-C, TN-C-S, TT
Input Connection	3 Phases+PE
Power Factor	≥ 0.99
Harmonic Distortion (THDi)	$< 5\%$
Overvoltage Category	AC side (Input) OVC: III
General Specifications	
Dimensions (W×D×H)	782mm x 782mm x 2287mm
Connectivity	Double SIM 4G, 5G, Wi-Fi, Ethernet
Screen Type	15.6 inch LCD Touch Screen
Cable Length	5m; 7.2m(Optional)
Standby Power	$< 85W$ (Depending on configuration)
Enclosure Rating	IP54/IK10
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS
Accessibility	Meets ADA requirements for height, reach, and user interface
Emergency Button	Yes
Warranty	24 months, warranty extension possible
User Interface	
Status Indication	Standard
Languages	English, French, Spanish, German, Italian (others available via software upgrade)
Credit Card Readers	Nayax Onyx; Payter P66/Apollo; PAX IM30; Worldline Valina; Castles S1U2
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE
Payment Terminal	AutoCharge, Plug & Charge, APP, RFID card, QR code, Credit Card (Optional)
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)
Cable Management System	Standard
Environmental Specifications	
Humidity	$< 95\%$ RH, non-condensing
Operating Altitude	2000m
Operating Temperature Range	-35°C to 55°C
Storage Temperature Range	-40°C to 70°C
Noise	$\leq 55\text{dBA}^{\text{①}}$ (Silent Mode)
EMC Compliance	EMC Class A
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV

(1) Standard environmental conditions 25°C, 1 m distance



Phone: +49(0)89 540299608
E-mail: evinfo.eu@autel.com
Website: autelenergy.com

Distribution Charging Unit



DS480		2*DS480 (DS960)		3*DS480 (DS1440)	
DC Output					
Output Power	160kW - 480kW		640kW - 960kW		800kW - 1440kW
Minimum Adjustable Power	40kW granularity				
Output Voltage	150 - 1000V				
Peak Efficiency	96%				
Number of Outputs (Max.)	8		12		14 (1*MCS+13*CCS2)
AC Input					
Input Voltage	3-phase 400V AC ±10% (2 Routes)		3-phase 400V AC ±10% (4 Routes)		3-phase 400V AC ±10% (6 Routes)
Input Frequency	50Hz/60Hz				
Earthing System	TN-S, TN-C, TN-C-S, TT				
Input Connection	3 Phases+PE				
Power Factor	≥0.99				
Harmonic Distortion (THDi)	<5%				
Overvoltage Category	AC side (Input) OVC: III				
General Specifications					
Dimensions (W×D×H)	782mm x 782mm x 2155mm		1564mm x 782mm x 2155mm		2346mm x 782mm x 2155mm
Connectivity	Double SIM 4G, 5G, Wi-Fi, Ethernet				
Standby Power	<85W (Depending on configuration)		<160W (Depending on configuration)		<240W (Depending on configuration)
Enclosure Rating	IP54/IK10				
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121				
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS				
Accessibility	Meets ADA requirements for height, reach, and user interface				
Emergency Button	Yes				
Warranty	24 months, warranty extension possible				
User Interface					
Status Indication	Standard				
Languages	English, French, Spanish, German, Italian (others available via software upgrade)				
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE				
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)				
Environmental Specifications					
Humidity	<95 % RH, non-condensing				
Operating Altitude	2000m				
Operating Temperature Range	-35°C to 55°C				
Storage Temperature Range	-40°C to 70°C				
Noise	≤55dBA" (Silent Mode)				
EMC Compliance	EMC Class A				
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht				
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV				

(1) Standard environmental conditions 25°C, 1 m distance



Phone: +49(0)89 540299608



E-mail: evinfo.eu@autel.com



Website: autelenergy.com

Distribution Charging Unit



DT800		DT500		DT1500	
DC Output					
Output Current	Liquid-cooled Cable: 500A (Max. 650A)		Uncooled Cable: 380A (Max. 500A);		Liquid-cooled Cable: 1500A+500A (Max. 650A)
Output Voltage	150 - 1000V				
Number of Outputs (Max.)	2 or 1		2 or 1		2
Charging Mode	2*CCS2; 1*CCS2		2*CCS2; 1*CCS2		1*MCS+1*CCS2
General Specifications					
Dimensions (W×D×H)	322mm x 322mm x 1950mm		322mm x 322mm x 1650mm		280mm x 780mm x 2285mm
Screen Type	8 inch LCD Touch Screen				
Cable Length	5m; 7.2m(Optional)		5m; 7.2m(Optional)		MCS: 3m; CCS2: 5m
Standby Power	<65W				
Enclosure Rating	IP55/IK10				
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121				
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS				
Accessibility	Meets ADA requirements for height, reach, and user interface				
Emergency Button	Yes				
Warranty	24 months, warranty extension possible				
User Interface					
Status Indication	Standard				
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE				
Credit Card Readers	Nayax Onyx; Payter P66/Apollo; PAX IM30; Worldline Valina; Castles S1U2				
Payment Terminal	AutoCharge, Plug & Charge, APP, RFID card, QR code, Credit Card (Optional)				
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)				
Cable Management System	Standard				
Environmental Specifications					
Humidity	<95 % RH, non-condensing				
Operating Altitude	2000m				
Operating Temperature Range	-35°C to 55°C				
Storage Temperature Range	-40°C to 70°C				
Noise	≤55dBA* (Silent Mode)				
EMC Compliance	EMC Class A				
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht				
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV				

(1) Standard environmental conditions 25°C, 1 m distance



 Phone: +49(0)89 540299608
 E-mail: evinfo.eu@autel.com
 Website: autelenergy.com

Charging Dispenser DepotBox



DT300	
DC Output	
Output Current	Uncooled Cable: 200A (300A Optional)
Output Voltage	150 - 1000V
Number of Outputs	1
Charging Mode	CCS2
General Specifications	
Dimensions (W×D×H)	520mm x 235mm x 580mm
Screen Type	None
Cable Length	7.5m (10m, 15m Optional)
Standby Power	<35W (Depending on configuration)
Enclosure Rating	IP65, IK10
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS
Emergency Button	Yes
Warranty	24 months, warranty extension possible
User Interface	
Status Indication	Yes
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE
Payment Terminal	AutoCharge, Plug & Charge, APP
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)
Cable Management System	Yes
Environmental Specifications	
Humidity	<95 % RH, non-condensing
Operating Altitude	2000m
Operating Temperature Range	-35°C to 55°C
Storage Temperature Range	-40°C to 70°C
Noise	≤55dBA ⁽¹⁾ (Silent Mode)
EMC Compliance	EMC Class A
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV

(1) Standard environmental conditions 25°C, 1 m distance



Phone: +49(0)89 540299608
E-mail: evinfo.eu@autel.com
Website: autelenergy.com

Charging Dispenser



DT1000

DC Output

Output Current	Liquid-cooled Cable: 800A (Max. 1000A)
Output Voltage	150 - 1000V
Number of Outputs	2
Charging Mode	CCS2

General Specifications

Dimensions (W×D×H)	280mm x 780mm x 2160mm (without CMS version)
Screen Type	8 inch LCD Touch Screen
Cable Length	5m
Standby Power	<65W
Enclosure Rating	IP55, IK10
Communication to the EV	ISO/IEC 15118 with PnC, DIN 70121
Software Update	OTA updates via web portal, FTP, FTPS, HTTPS
Emergency Button	Yes
Warranty	24 months, warranty extension possible

User Interface

Status Indication	Yes
RFID Protocols	ISO 14443 A/B, ISO/IEC 15693, MIFARE
Credit Card Readers	Nayax Onyx; Payter P66/Apollo; PAX IM30; Worldline Valina; Castles S1U2
Payment Terminal	AutoCharge, Plug & Charge, APP, RFID card, QR code, Credit Card (Optional)
Communication Protocols	OCPP 1.6J (OCPP 2.0.1 Optional)
Cable Management System	Yes

Environmental Specifications

Humidity	<95 % RH, non-condensing
Operating Altitude	2000m
Operating Temperature Range	-35°C to 55°C
Storage Temperature Range	-40°C to 70°C
Noise	≤55dBA ⁽¹⁾ (Silent Mode)
EMC Compliance	EMC Class A
Compliance and Safety	IEC 61851-1, IEC 61851-21-2, IEC 61000, Eichrecht
Certification	CE; UKCA; TR25; ETSI EN 303645; TÜV

(1) Standard environmental conditions 25°C, 1 m distance



Phone: +49(0)89 540299608



E-mail: evinfo.eu@autel.com



Website: autelenergy.com

AUTEL[®]



Phone: +49(0)89 540299608 | Website: autelenergy.com | E-mail: evinfo.eu@autel.com